

## C18 High Frequency Concrete Saw and P8000 Converter

450 mm (18") wet diamond saw with 6500W high frequency brushless motor for up to 175mm depth of cut. Flush cut capability.

Blade Guard with Toggle Latches for quick conversion to Flush cutting

LED Load Warning Lamp

Special Motor Coupling Cable

6500W, water cooled Brushless Motor for outstanding power and efficiency. Constant speed is maintained regardless of load.

**C18**  
IP Class: IP55

TECHNICAL DATA: C18	
POWER (INPUT/OUTPUT)	3ø ~ 380-480V 6500W/5500W (16A) 3ø ~ 220-240V 4200W/3500W (16A), 6500W/5500W (25A) 1ø ~ 200-240V 3750W/2800W (16A), 6500W/5500W (32A)
NO LOAD RPM	2500 / min
LINEAR SPEED W/18" BLADE	67 m/s
BLADE DIAMETER	457 mm (18")
ARBOR	25.4 mm (1")
MAX. CUTTING DEPTH	175 mm (6-7/8")
DIMENSIONS (L X W X H)	810 x 260 x 310 mm
WEIGHT	11.6 kg (25.5 Lbs)

### STANDARD ACCESSORIES

- \* Flush Cutting Flange Kits
- \* Flush Cutting Rim Brush

### OPTIONAL ACCESSORIES

- \* Single Phase Adaptor Plug



### TECHNICAL DATA: P8000

POWER	Input: 50-60 Hz 3ø ~ 380-480V 8000W (16A) 3ø ~ 220-240V 7000W (32A) 1ø ~ 200-240V 7000W (32A)
MIN. WATER FLOW (25°C)	3.5L / min (1gpm)
MAX. WATER PRESSURE	7 bar (100psi)
DIMENSIONS (L X W X H)	460 x 220 x 260 mm
WEIGHT	7.1 kg (15.6 Lbs)

### P8000

Converter Build-in PRCD has full electronic protection for over and under voltage, thermal and current overload



## R16 High Frequency Ring Saw and P8000 Converter

400mm (16") wet ring saw with 6500W high frequency brushless motor for up to 300mm depth of cut.

300mm Depth of Cut

LED Load Warning Lamp

6500W, water cooled Brushless Motor for outstanding power and efficiency. Constant speed is maintained regardless of load.


High Stability Guide Roller design keeps the blade stable and centralized when beginning the cut

**R16**  
IP Class: IP55

TECHNICAL DATA: R16	
POWER (INPUT/OUTPUT)	3ø ~ 380-480V 6500W/5500W (16A) 3ø ~ 220-240V 4200W/3500W (16A), 6500W/5500W (25A) 1ø ~ 200-240V 3750W/2800W (16A), 6500W/5500W (32A)
NO LOAD RPM	2500 / min
LINEAR SPEED W/18" BLADE	53.0 m/s
BLADE DIAMETER	405 mm (18")
MAX. CUTTING DEPTH	300 mm (11-13/16")
DIMENSIONS (L X W X H)	830 x 240 x 460 mm
WEIGHT	12.8 kg (27.5 Lbs)

### P8000

Converter Build-in PRCD has full electronic protection for over and under voltage, thermal and current overload

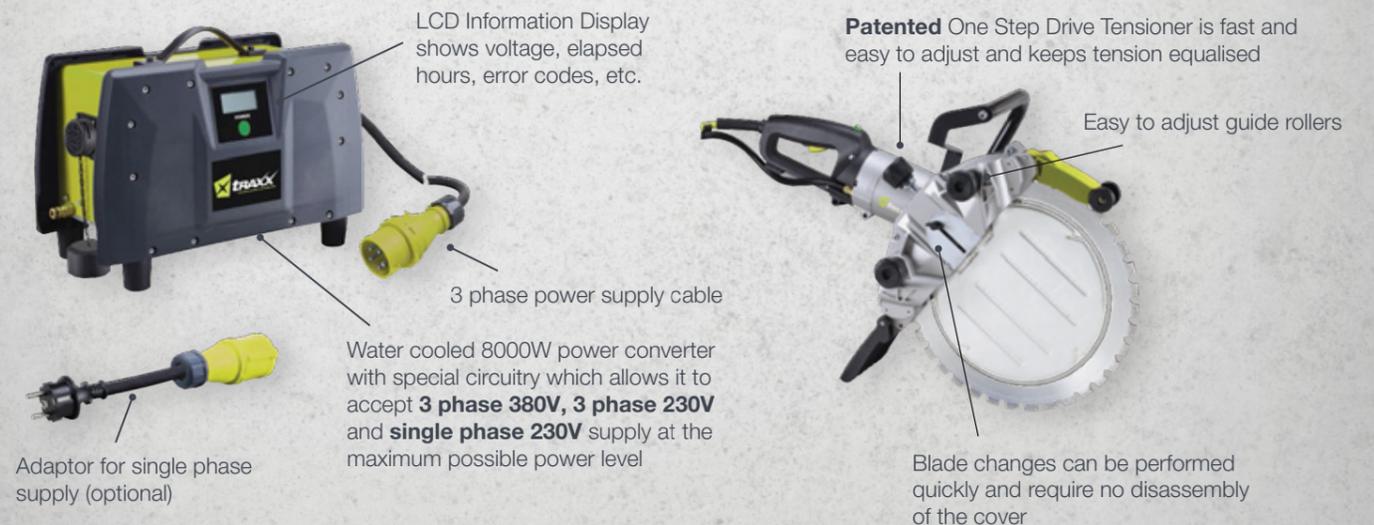

### TECHNICAL DATA: P8000

POWER	Input: 50-60 Hz 3ø ~ 380-480V 8000W (16A) 3ø ~ 220-240V 7000W (32A) 1ø ~ 200-240V 7000W (32A)
MIN. WATER FLOW (25°C)	3.5L / min (1gpm)
MAX. WATER PRESSURE	7 bar (100psi)
DIMENSIONS (L X W X H)	460 x 220 x 260 mm
WEIGHT	7.1 kg (15.6 Lbs)



Unit 4/1 Rocklea Drive, Port Melbourne, Victoria, Australia 3207

Phone: 1300 109 108 | Telephone: +61 (0)3 9646 9200

Email: info@traxxcp.com.au | Website: www.traxxcp.com.au